

### CBD20-150 Electric Pedestrian Pallet Truck

#### Configuration and performance

- Electronic power steering system, light and low noise.
- AC Driving system, No carbon brush, maintenance free.
- Electromagnetic regenerative braking system.
- Automatic lifting limit, safety, energy saving.

#### Safety

- Curve automatic deceleration devices, more safe.
- Stepless speed control system, safe and quiet.
- Controller with Multiple automatic protection.
- Emergency reversing device/Emergency brake switch.

#### Options



- 170Ah VRLA Battery-Built-in charger.
- Handle upright walking function.

#### Option

- Lithium battery

Feature	
Model	CBD20-150
Loading capacity	2000 kg
Load center	600 mm
Wheel base	1390 mm
Operating type	Walkie
<b>Wheels</b>	
Wheels type	PU
Wheel quantity	1/1/4
Driving wheel size	Φ248×75
Bearing wheel size	Φ84×80(Double wheels)
Balance wheel size	Φ115×55
<b>Dimension</b>	
Min.fork lowered height	85 mm
Max.fork lifting height	195 mm
Max.lifting height	110 mm
Overall fork width	540/600/650/685 mm
Inside width between forks	200/260/310/345 mm
Fork length	1150/1200 mm
Fork width	170 mm
Fork thickness	75 mm
Overall length	1750 mm
Overall width	720 mm
Overall height(With handle)	1385 mm
Overall height(Without handle)	850 mm
Min.Turning radius	1575 mm
Min.Aisle width for pallets 800×1200	1900 mm
Min.Aisle width for pallets 1000×1200	1940 mm
<b>Performance</b>	
Travel speed,laden/unladen	3.5/4.0 km/h
Lift speed,laden/unladen	20/25 mm/s
Lowering speed,laden/unladen	40/30 mm/s
Gradeability,laden/unladen	% 6/16
<b>Electrical configuration</b>	
Drive motor	kW AC 1.5
Lift motor	kW DC 1.2
Steering motor	kW DC 0.15
<b>Brake</b>	
Battery	Electromagnetic/Regenerative
Battery voltage / capacity	Lead-acid battery 24/210 V/Ah Lithium battery (Optional) 24/200
Controller	ZAPI
Battery weight	kg 192
Service weight with battery	kg 605

\* Details of specifications and equipment are based on information available at time of printing and may change without notice.

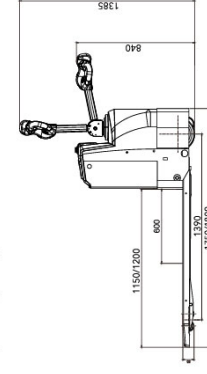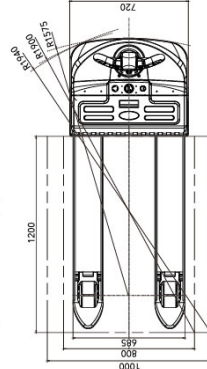

#### ANHUI HELI CO., LTD.

ADD: NO.668 Fuping Street, Economic Development Zone, Hefei P.R.China  
 TEL: (86 551) 63639068 (America) 63639258 (Europe) 63639358 (Asia)  
 63662105 (Africa & Middle East) 63639530 (Key Accounts division)  
 63662105 (Wheel loader)  
 FAX: (86 551) 63639966  
 WEBSITE: <http://www.heliforklift.net>  
 Email: [hel@helichina.net](mailto:hel@helichina.net)

AUTHORIZED DEALER